




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01M 2/10	A1	(11) International Publication Number: WO 98/32182 (43) International Publication Date: 23 July 1998 (23.07.98)
<p>(21) International Application Number: PCT/US98/00811</p> <p>(22) International Filing Date: 15 January 1998 (15.01.98)</p> <p>(30) Priority Data: 08/784,853 15 January 1997 (15.01.97) US</p> <p>(71) Applicant: BOLDER TECHNOLOGIES CORP. [US/US]; Suite 103, 5181 Ward Road, Wheat Ridge, CO 80033 (US).</p> <p>(72) Inventors: WALKER, Thomas, P.; 4236 S. Eldridge Street #202, Morrison, CO 80465 (US). JUERGENS, Tristan, E.; 77 Hillside Lane, Telluride, CO 81435 (US).</p> <p>(74) Agent: BEATON, Glenn, K.; Davis Graham & Stubbs, LLP, 370 Seventeenth Street, P.O. Box 185, Denver, CO 80201-0185 (US).</p>	<p>(81) Designated States: JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: **BATTERY CASE**

(57) Abstract

An electrochemical cell case and method of manufacturing an electrochemical battery are provided. The cell case includes a main body (10) that encloses a plurality of individual cells in separate, contiguous compartments (20, 30, 40, 50, 60), the compartments (20, 30, 40, 50, 60) are hermetically sealed. The compartments (20, 30, 40, 50, 60) may be separately filled and vented, and the cell of each compartment receives end connectors such as rivet connectors. The elements are electrically interconnected, such as in a series of configuration. A top cap (80) attaches to the main body, and encloses the interconnected cell terminals. The top cap (80) may also enclose other electronics, such as battery recharging circuitry or a temperature sensor. The top cap (80) may be sized and shaped to mate with connectors on specific electrical devices, and may be removable so that another top cap (80) may be installed for use with another device.

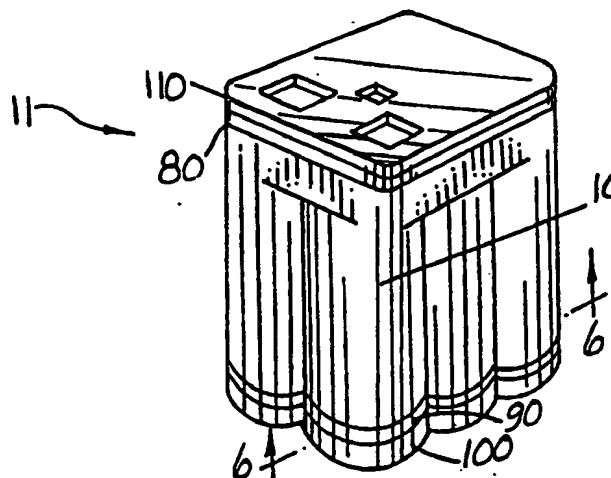

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

BATTERY CASE

5 FIELD OF THE INVENTION

The present invention relates to the field of electrochemical battery cells and cell cases, and more particularly to a battery that contains a plurality of lead-acid cells in separated gas spaces and that may interchangeably mate with a variety of electrical connectors such as those integrated within power tools.

BACKGROUND OF THE INVENTION

The use of portable, rechargeable electrochemical cells has been rapidly increasing in recent years. With developments in rechargeable battery technology, rechargeable batteries are used for power not only in traditional areas such as flashlights and small electronic devices but also in heavy duty power tools, temporary power sources, and even vehicles. Of course, rechargeable batteries are also widely used in the starting systems of internal combustion vehicles and tools. Many of the rechargeable batteries in use today are nickel-cadmium, nickel-metal hydride or lithium batteries. Recent advances in lead-acid batteries, such as those disclosed in U.S. Pat. No. 5,047,300 to Juergens and assigned to the assignee of the present invention, have increased the utility and the popularity of portable, rechargeable lead-acid battery systems.

Of course, some case or housing must be used to contain the cells that comprise a battery so that the cells' electrical energy may be safely and conveniently used and transported. Since many uses require the battery to be frequently recharged, the battery should be easily manipulable between a battery-powered device and a recharger. It is also desirable that a battery be compatible, perhaps with adaptations, with a variety of the connectors that are often found on battery-powered devices, so that the same battery may potentially be used with many different devices. A case that contains several cells is often termed a "battery

SUBSTITUTE SHEET (RULE 26)

pack" or a "power pack." In the present application, it should be understood that what is referred to as a "battery case" may contain several electrochemical cells, wherein each cell may comprise a plurality of electrodes or, for example, two long spirally-wound electrodes.

5 Many rechargeable battery cases and rechargers and tools useful therewith have been developed, and these devices address a variety of uses. U.S. Pat. Nos. 5,144,217 and 5,391,972 to Gardner et al. disclose a combination battery back/recharger wherein the charger may accommodate several battery configurations. U.S. Pat No. 5,200,280 to
10 Karasa discloses a device that surrounds a battery to prevent accidental discharge. U.S. Pat. No. 4,339,201 discloses a battery case to prevent terminal short-circuiting. U.S. Pat. Nos. 4,871,629 to Bunyea; 3,883,789 to Achenbach et al.; 3,999,110 to Ramstrom et al.; 5,368,954 to Bruns; 5,213,913 to Anthony et al.; 5,208,525 to Lopic et al.; 4,084,123 to
15 Lineback et al.; 5,089,738 to Bergquist et al.; 5,336,953 to Alleman; 4,616,169 to Proffitt; 4,447,749 to Reeb, Jr. et al.; 4,339,201 to Nagahara; and 3,757,194 to Weber et al. disclose latching arrangements and other mechanical and electrical connections between battery cases and electric devices.

20 U.S. Pat. No. 4,751,452 to Kilmer et al. discloses a battery case that precludes the battery from attempted recharge when the battery is of a non-rechargeable type. U.S. Pat. No. 5,296,314 to Millauer provides a battery case keyed to provide the appropriate voltage to selected electric devices.

25 None of these prior art devices, however, address the difficulties associated with lead-acid cells, such as filling, venting, and attaching end connectors. Some of these devices are meant to function in several electric tools; however, none of these devices are designed to allow the same unit of cells to be adapted to a variety of tools by substituting
30 external connectors.

SUMMARY OF THE INVENTION

The present invention includes a cell case (sometimes called a "monoblock") that houses a plurality of electrochemical cells, preferably of the lead-acid type. The individual cells are located in hermetically-sealed compartments, so that there is no atmospheric communication between the several cells. The cells are electrically connected to each other, such as in a series configuration, so that they may be attached to a tool or other electrically-powered device and function as one electrical unit. The monoblock includes interchangeable adapters including electrical connectors, so that the same cells may be used with a variety of tools or other devices. The adapters may also include electrical circuitry, such as recharging circuitry. If included, the recharging circuitry may incorporate a variety of features, such as a heat sensor or a voltage sensor that modulates the battery charging parameters, such as time of charge and charge current, to the charging condition of the battery. For example, a cutoff circuit such as described in U.S. Patent Application No. 08/079,056, assigned to the assignee of the present invention, may control the monoblock battery charging. Other circuitry may be included in addition to or instead of a charger, such as a safety cut-off that electrically disconnects the battery if the battery temperature exceeds a preselected value.

The individual electrochemical cells are preferably spirally-wound ultra-thin plate lead acid cells, which allow for about twice the useable energy of competing cells, such as nickel-cadmium cells, at high discharge rates. The increase in usable energy primarily results from the lead-acid cells' ability to supply a relatively constant voltage as the cells discharge. Nickel-cadmium cells, in contrast, lose a significant amount of voltage during discharge, so that much of the energy theoretically available may not be supplied at a power level sufficient for many applications. For instance, nickel-cadmium batteries may not be able to supply the voltage required to provide enough torque to a drill to allow the drill to penetrate many materials or to spin the drill bit fast enough to

SUBSTITUTE SHEET (RULE 26)

provide satisfactory drilling speeds after the cells have become partially discharged.

5 The monoblock is preferably constructed of several components that allow for the lead-acid cells to be essentially permanently grouped together, and for interchangeable adapters to be connected thereto. The monoblock also allows for the cells to be filled with electrolyte and to vent gas that may form within the cells, and to contain any electrolyte that may otherwise leak from the cell. The central unit consists of connected plastic containers, where each container is shaped to hold an individual spirally wound cell. The containers are preferably arranged in an array of rows and columns, so that the monoblock will have a rectangular block-like shape. The containers are preferably cylindrical, so that interstices are formed between the rows and columns. These interstices allow a sensor, such as a temperature sensor, to be inserted into the core of the monoblock.

15 The containers are manufactured with open-ended bottoms, so that the spirally wound cells may be inserted through these bottoms into the containers. After the cells are inserted into the container, a bottom cover plate is attached to the bottom of the containers, so that cells are sealed within. The bottom cover plate contains ventilation ports, such as Bunsen valves, beneath each container, so that excess gas may be released. Additionally, the cover plate contains a hole beneath each container, so that an end connector may be attached to each cell. Preferably, two rivet-type end connectors are used within each cell, one each for the positive and negative connectors. A bottom cap is attached beneath the cover plate to form the bottom surface of the monoblock. The bottom cap encloses the electrical connections between the cells, as well as any electrolyte that may happen to leak from the battery. Absorbent, foraminous material may be placed between the bottom cap and the cover plate to absorb any leaked electrolyte. The bottom cap preferably also includes ventilation ports, to release any gas that is vented from the containers into the area between the cover plate and the bottom cap. The

cover plate may be attached to the containers by any of several suitable methods, such as ultrasonic or thermal welding or by adhesives. The bottom cap may be similarly attached to the cover plate.

5 The main body contains an integral top that forms the top of each container. Above each container, the integral top has two holes. One hole receives a rivet that serves as the electrical connector of the opposite polarity from the connector that attaches to the container bottom. The second hole is a fill port that allows electrolyte to be introduced into each container. After the electrolyte has been introduced, this fill port
10 may be sealed, such as by a plug.

A top unit removably attaches to the main body, and serves several functions. The top unit has two electrical connectors that mate with the electrical connectors of the main body. As described above, the electrical
15 connectors of each cell are connected to one another, such as in a series configuration. The positive and negative connectors of the series assembly mate with the positive and negative connectors, respectively, of the top unit. The top unit is physically configured to mate with a specific electric tool or family of tools. It may also contain additional electrical features such as a recharger or a temperature sensor, or both. The top
20 unit may be removed from the main body, allowing a user to power different battery operated devices. Another top unit that physically connects with another electrical device may be mounted onto the main body, and the monoblock may again be used.

It should therefore be appreciated that the present invention allows a
25 group of batteries, specifically lead-acid batteries, to power a variety of battery powered devices. The invention provides a safe, durable, and convenient method of combining a number of lead-acid batteries together, and may include supplementary electronics such as a recharger.

30 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a side elevation view of an embodiment of the present invention.

SUBSTITUTE SHEET (RULE 26)

FIG. 2 is bottom plan view of the main body of the present invention.

FIG. 3 is a top plan view of the main body of the present invention.

FIG. 4 is a top plan view of the bottom cover of the present invention.

FIG. 4A is a detailed side profile view of a Bunsen valve of the bottom
5 cover.

FIG. 5 is top plan view of a top cap according on one embodiment of
the present invention.

FIG. 6 is a top plan view of the bottom cap of the present invention.

FIG. 7 is a diagrammatic horizontal cross section of the
10 electrochemically active components of a spirally wound cell of the type
preferably contained within the main body of FIG. 1.

FIG. 8 is voltage discharge graph comparing of the performance of a
battery according to present invention with a competing battery.

FIG. 9 is a perspective view of the present invention.

15 DETAILED DESCRIPTION OF THE INVENTION

Referring to FIG. 9, an embodiment of the present invention has a
main body 10 that includes a plurality of connected cell compartments. As
can be seen in FIGs 1 and 2, the main body 10 includes six
20 compartments, 20, 30, 40, 50, and 60, arranged in two rows and three
columns. Each compartment may enclose a separate electrochemical
cell, such as representative cell 22 contained within compartment 20. The
compartments are contiguous, and each compartment has a sidewall that
is partially shared with a portion of a neighboring, contiguous
25 compartment. For instance, compartment 20 shares a portion of its
sidewall with compartment 30 and also shares a portion of its sidewall
with compartment 50.

The main body 10 includes an integral top 80 that covers each of the
compartments (see FIG. 3). The top 80 contains two openings associated
30 with each compartment. One opening, such as opening 84 associated
with compartment 20, is a fill port that allows electrolyte to be added to the
cell 22. The second opening, such as opening 82, also associated with

compartment 20, allows the insertion of a cell terminal so that the electricity produced within each compartment may be utilized. Preferably, the terminal is a rivet connector of the type disclosed in U.S. Patent Application No. 08/534,790.

5 The top 80 also contains two additional openings 86, 88 that extend between compartment groupings. The compartments are preferably cylindrical, so that a separation exists at the compartment interfaces. The openings 86, 88 allow ventilation through the top 80 along the entire depth of the compartments. Optionally, a temperature sensor (not shown)
10 may be inserted into either the opening 86 or the opening 88. The cells may be disconnected from their load if the sensor indicates that the battery is operating at an unsafe or otherwise undesirable temperature.

 With reference to FIG. 2, the bottom of the main body 10 is essentially open, allowing the cells (such as cell 22) to be inserted into the
15 compartments (such as compartment 20). The cells cannot be inserted from above, because the integral top 80 substantially blocks access to the compartments. After the cells are inserted into the compartments, a bottom cover plate 90 is attached to the bottom of the main body 10 in order to contain the cells within the compartments (see FIG. 4). The
20 bottom cover plate 90 has the same cross sectional dimensions as the main body 10, and may be attached thereto by ultrasonic or thermal welding, adhesives, or other suitable means to form an hermetic seal.

 The bottom cover plate 90 has two openings associated with each compartment. The first opening, such as opening 92 associated with
25 compartment 20, allows the insertion of a cell terminal into the compartment. This corresponds to the opening 82 in the top sheet 80. However, the cell terminal inserted through the opening 92 will be connected to plates of opposite polarity than is the separate terminal inserted through the opening 82.

30 The second opening, such as opening 94 associated with compartment 20, serves as a valve that vents the compartment 20 of excess gas that may develop therein during the chemical reactions.

SUBSTITUTE SHEET (RULE 26)

Preferably, the opening 94 is through a valve stem 96 that projects downwards from the bottom cover plate 90 as shown in the detail of FIG.

4A. While many one-way valves may be used, a Bunsen valve is preferred because of its simplicity and reliability. In a Bunsen valve, an elastomeric sheath 95 is fitted over the valve stem 96. When the gas pressure within the compartment 20 exceeds the external gas pressure, the sheath 95 is displaced from the valve stem 96, so that gas may be vented from the compartment 20. When the pressure within the compartment 20 is reduced to closer to the ambient pressure, the elastomeric quality of the sheath 95 causes it re-seat onto the valve stem 96.

Referring to FIG. 6, a bottom cap 100 attaches beneath the cover plate 90. The bottom cap 100 has substantially the same cross sectional dimensions as the bottom cover plate 90. A raised ridge 102 surrounds a central platform 104 of the bottom cap, so that the ridge 102 contacts the bottom cover plate 90 and the central platform 104 is spaced away from the cover plate 90. This space between the bottom cover plate 90 and the bottom cap 100 provides space for routing terminal connector wire to connect the bottom terminals of the cells contained in the compartments, so that the electronics are shielded from exterior contact. Additionally, the space maintained between the cover plate and the bottom cap serves as a reservoir to collect any electrolyte that may leak from the cells. Foraminous, absorbent material may be included in the space 106 (see FIG. 1) between the bottom cover plate 90 and the bottom cap 100 to absorb any leaked electrolyte. However, the type of lead-acid cells preferably contained within the compartments maintain electrolyte absorbed within separator material of the cell, so that electrolyte leakage is uncommon. The bottom cap is preferably perforated, such as with micro-perforations 108, to allow any pressure caused by gas transport through the valve stem openings to escape.

A variety of top caps, such as top cap 110, may fit over the top 80 of the main body (see FIG. 5). The top cap 110 provides the electrical

SUBSTITUTE SHEET (RULE 26)

connectors that join the battery terminals of the cells contained within the main body 10 to an electric tool or other device. Two terminal cutouts, 112, 114, are formed in the top cap 110. The terminals may take a variety of forms depending on the specific application. For instance, if the battery is to be used as a starter power source for a vehicle, such as a motorcycle, simple lugs may protrude from or be accessible through the cutouts 112, 114.

More specialized connectors may be used to connect with specific connectors for other applications. Preferably, the top cap is removable from the top 80. A variety of top caps may then be used with the same main body 10, allowing the same battery to be used in a variety of applications. The top caps will vary in size, shape and type of electrical connectors, depending on the application. The attachment between top caps and the top 80 may be any suitable means, such as by adhesive ultrasonic welding or screw.

A sensor cutout 116 may also be formed in the top cap, directly above the opening 86 that extends between the compartments 20, 30, 50, and 60. The sensor cut out 116 provides an opening through which a sensing probe may be inserted into the core of the main body 10. The operation of the battery may be controlled depending upon parameters such as temperature that may be sensed by the sensor probe in the opening 86 (see FIG 3).

While the present battery has application with a variety of electrochemical cells, it is particularly suited for use with an embodiment of the lead-acid cells of the type described in co-pending application 08/534,790 and the other U.S. applications and patents in the chain of this application, the contents of which are hereby incorporated. With reference to FIG. 7, such batteries are generally spirally wound, and include a negative plate 180 and a positive plate 190 that are separated from each other by separator material 200. Acceptable active positive plate materials include, among others, sulfated lead pastes, PbO , Pb_3O_4 , or leady oxide. Acceptable active negative plate material includes, among

SUBSTITUTE SHEET (RULE 26)

others, sulfated lead paste, PbO, or leady oxide. An example of suitable separator material is a glass mat composed of microfiber material consisting of 90% fibers 1 to 4 microns in diameter and 10% fibers that are somewhat larger.

5 As described in co-pending application 08/534,790, the cells preferably use cast-on end connectors to connect the positive and negative plates of each cell to their respective terminals. For example, a rivet extends through opening 82 (see FIG. 3) into the compartment 20 (see FIG. 1), and contacts the cast on connector. Expanding the rivet
10 mandrel causes the body of the rivet to form a strong interference fit with the cast-on connector. The fit between the terminal and the connector is further strengthened by an elastomeric sleeve disposed between the connector and compartment 20. The expansion of the rivet compresses the elastomeric sleeve, thereby forming a fluid seal around the
15 compartment opening 82 as well as a mechanically and electrically strong connection.

 The cell contained within compartment 20 is filled by introducing electrolyte through fill port 84. Perforations in the cast-on connector allow the introduced electrolyte to disperse within the region of compartment 20 containing the plates and separator. After the compartment has been
20 filled, the fill port 84 is permanently sealed, such as by welding or otherwise attaching a connector plug into the fill port 84.

 Venting of the compartment 20 is preferably accomplished by the venting opening 94 located in the valve stem 96 of the bottom cover plate
25 90.

 While a preferred embodiment has been described, it should be apparent that many variations could be made to the monoblock that would not essentially alter its functionality. As one example, some of the components that have been described as being placed on the top of the
30 monoblock could be placed on the bottom, and vice versa.

Example

SUBSTITUTE SHEET (RULE 26)

A monoblock according to the present invention was constructed using six one-inch diameter cells with a depth of 2.350 inches. The lead-acid cells were of the type described in the above referenced patents and applications of which this application is a continuation-in-part. The monoblock was used to power a drill to repeatedly drill holes through a wooden test board. Referring to FIG. 8, curve A shows the voltage across the board as a function of time. Curve B shows the voltage versus time results of a nickel-cadmium battery pack of the same approximate size, subject to the same test conditions. The results indicate a much more rapid decline in voltage for the nickel-cadmium battery. Energy within the nickel-cadmium battery may not be available at sufficient voltages to satisfy certain applications. The monoblock of the present invention, in contrast, supplied most of its energy at useable voltages. The voltage was maintained within 10 per cent of a nominal rating for about 350 seconds; the voltage began to rapidly decline at about 370 seconds.

SUBSTITUTE SHEET (RULE 26)

1/3

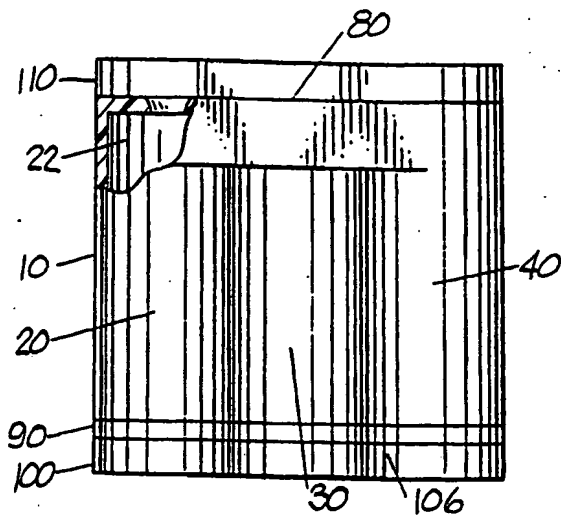


FIG. 1

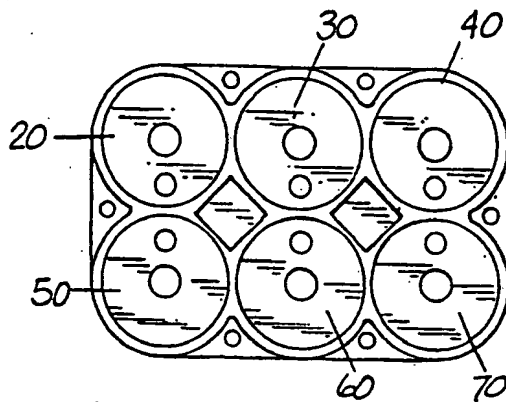


FIG. 2

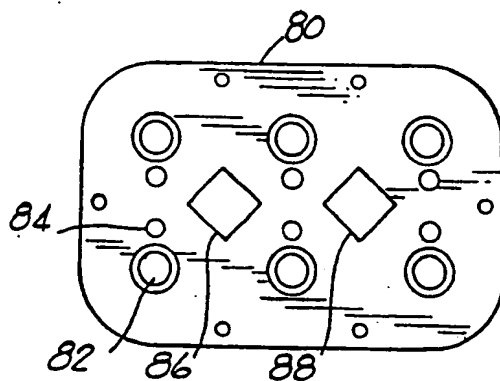


FIG. 3

SUBSTITUTE SHEET (RULE 26)

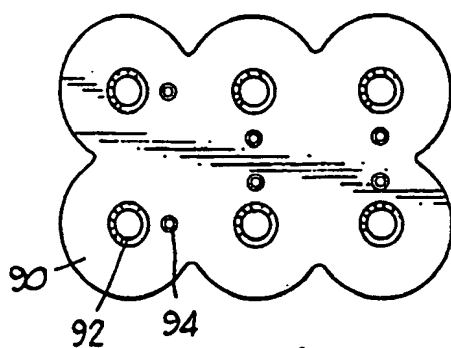


FIG. 4




FIG. 4A

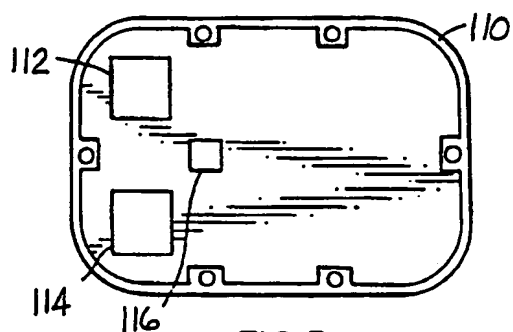


FIG. 5

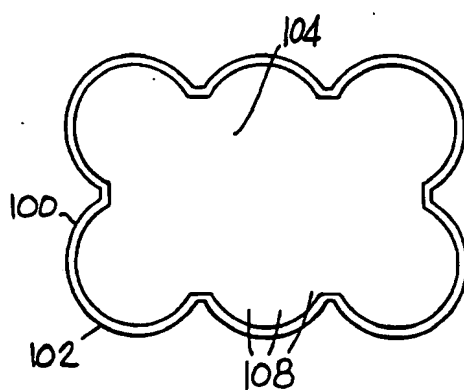


FIG. 6

SUBSTITUTE SHEET (RULE 26)

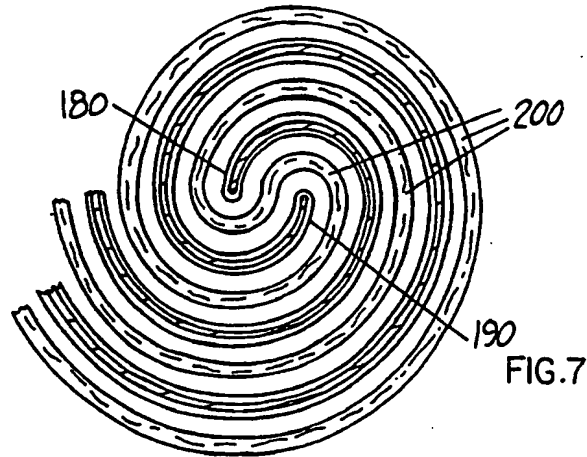


FIG. 7

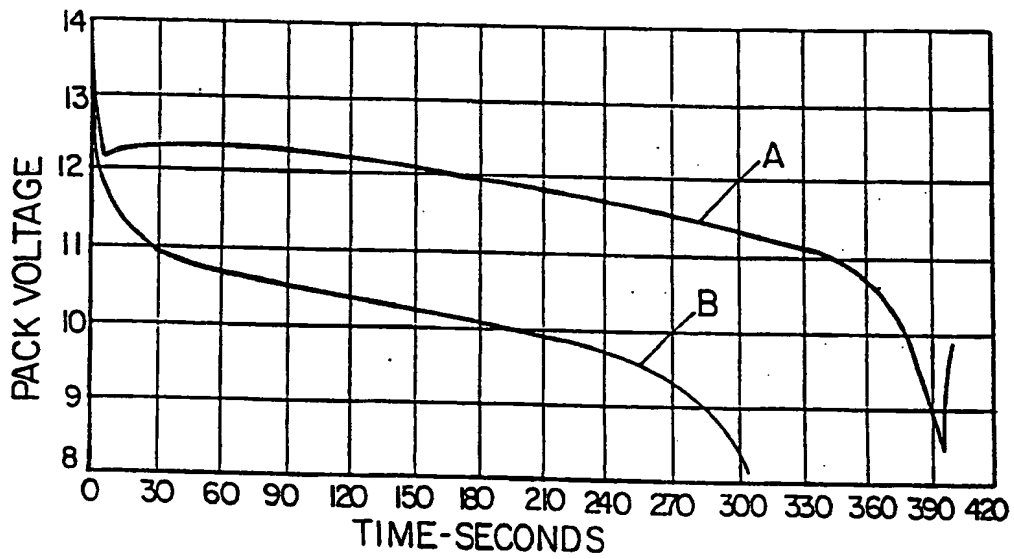


FIG. 8

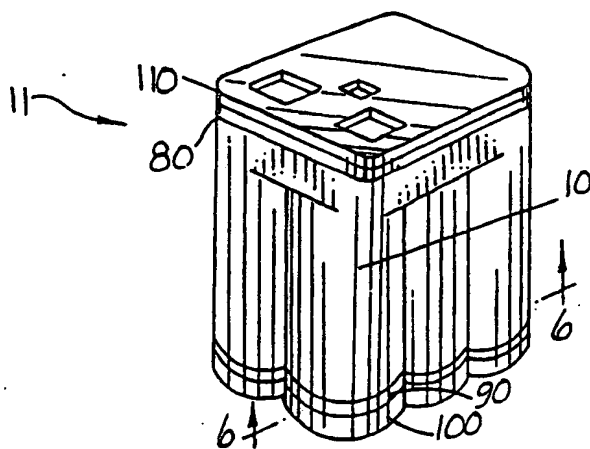
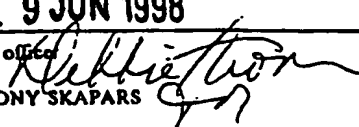


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US98/00811

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) :H01M 2/10 US CL :429/99,100 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 429/99,100, 163, 123, 176, 178, 62 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3,918,460 A (KING ET AL) 11 November 1975	none
A	US 4,097,654 A (GUAZZONI) 27 June 1978	none
A	US 4,599,283 A (THIELE ET AL) 08 July 1986.	none
A	US 5,437,938 A (MITSUI ET AL) 01 August 1995.	none
A	US 5,476,731 A (KARSTEN ET AL) 19 December 1995	none
A	US 5,489,486 A (GLOVER) 06 February 1996.	none
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* "A"	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"B"	earlier document published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, each combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	
"P"	document published prior to the international filing date but later than the priority date claimed	*A* document member of the same patent family
Date of the actual completion of the international search 01 APRIL 1998		Date of mailing of the international search report 19 JUN 1998
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer  ANTHONY SKAPARS Telephone No. (703) 308-2773

Form PCT/ISA/210 (second sheet)(July 1992)*

This Page Blank (uspto)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.